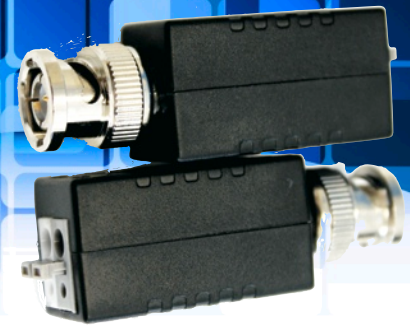


BE - 3911U-PTR(o)B
 1Channel Passive UTP Transceiver

Features :

- 1 channel Video Passive balun (UTP Converter)/Transceiver
- Real-time & high-performance video signal over UTP cable
- Can be used as either Transmitter or Receiver, No power required
- Connects to camera directly
- Transmission distance up to 300m with 1Ch/4Ch Passive Transceivers
- Transmission distance up to 600m with 1Ch/4Ch Active Receivers
- Compatible with PAL, NTSC, SECAM formats
- Built-in Surge & Transient protection, Super interference rejection

Specifications :

Video Transmitting Properties	Compatible with	PAL, NTSC & SECAM
	Transmitting Band	0-6MHZ
	Transmission Distance(max)	300m (With passive baluns) 600m (With active baluns)
	Interference Rejection Attenuation	>60dB <1.5dB
Connection Properties	Video Connector	BNC-M; Impedance:75 ohms
	UTP Cable Connector	Push terminals; Impedance: 50Ω
	Video Input Protection (as transmitter)	2KV(common mode),10/700us IEC61000-4-5/1955(GB/T17626.5-1999)
Stability	Video Output Protection (as transmitter)	2KV(different mode),10/700us IEC61000-4-5/1955(GB/T17626.5-1999)
	MTBF	>50,000h
Physical Properties	Dimensions	37 x 22 x 21mm (LWH)
	Housing Material	ABS Engineering Plastic
	Unit Color	Black
	Net Weight	16.8g
Environmental	Operating Temp	-20°C ~ +70°C
	Humidity	0 ~ 95%
	Storage Temp	-40°C ~ +150°C