

BE - 3914U-PTR


4 Channel Passive UTP Transceiver



Features :

- 4 channel Video Passive balun (UTP Converter)/Transceiver
- Real-time & high-performance video signal over UTP cable
- Can be used as either Transmitter or Receiver, No power required
- Transmission distance up to 300m with 1Ch/4Ch Passive Transceivers
- Transmission distance up to 600m with 1Ch/4Ch Active Receivers
- Compatible with PAL, NTSC, SECAM formats
- Built-in Surge & Transient protection, Super interference rejection

Schematic :

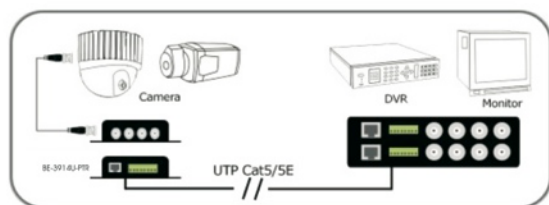

Specifications :

Video Transmitting properties	Compatible with	PAL, NTSC, SECAM
	Transmitting Band	0-6MHz
	Interference Rejection	>60dB
Connection Properties	Attenuation	<1.5dB
	Video Connector	4* BNC-F
	Impedance	75Ω
Protections	UTP Cable Connector	1* RJ-45/ green terminal block
	Impedance	100Ω
Physical Properties	Video Input Protection (as transmitter)	2KV(common mode), 10/700us IEC61000-4-5/1955
	Video Output Protection (as transmitter)	2KV(different mode), 10/700us IEC61000-4-5/1955
Environmental	Dimensions	104*80*27mm (LWH)
	Housing Material	Metal
	Unit Color	Black
	Net Weight	160g
Casing	Operating Temp	-20°C ~ +70°C
	Relative Humidity	0 ~ 95%(non-condensing)
	Storage Temp	-40°C ~ +150 °C
Casing	Gross Weight	209.4g
	Casing Volume	127 x 110 x 52mm (LWH)