

BE - 39P01-GLI CCTV Video Ground loop Isolator




Features :

- Passive, No External Power required
- Eliminates Image distortion caused by ground Loops
- Eliminates Image Tearing, Cross talk and so on
- Protects from electrical cable interference
- Built-in 800V video Isolator.
- Built-in Super Surge Protection Circuit.
- Compact and Simple BNC serial connectivity

Schematic :

Typical Diagram 1:

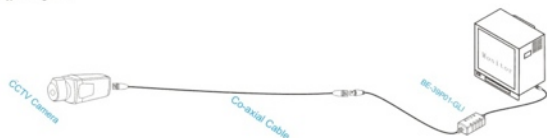

Typical Diagram 2:



Specifications :

Electricity Performance	Insertion loss	0.5 dB
	Freq Response	0-3dB / 0-10MHz
	Input Impedance	75Ω
	output Impedance	75Ω
	Isolation Voltage	800V (min)
	Isolation Resistance	100 M Ω
Protection	ESD	Contact Discharge : 6KV Air Discharge : 8KV Standard : IEC61000-4-2
	Surge Protection	4KV 10/700us IEC61000-4-5
Physical Properties	Dimension (LWH)	Body:55mm x 30mm x 22mm Total Length : 550mm
	Housing Material	ABS Engineering Plastic
	Unit Color	Black
	Net Weight	77g
Environmental	Operating Temp	-20°C ~ +55°C
	Relative Humidity	0 ~ 95% Non Condensing
	Storage Temp	-40°C ~ +80°C