



BE-4720CAP

H.264, 2.1 MP IP POE Box Camera



Features :

- 1/2.8" 2.1 MP Progressive Sony CMOS sensor
- H.264 Main Profile & MJPEG dual-stream
- Max 25/30fps@2.1MP (1920 x 1080)
- Digital WDR, 2D , 3D NR, AWB, AGC, BLC
- Optional "C" Mount Lens
- Multiple Network Monitoring: Web viewer, CMS, Smart phone
- Micro SD Card Slot (max 64GB),
- Built-in POE

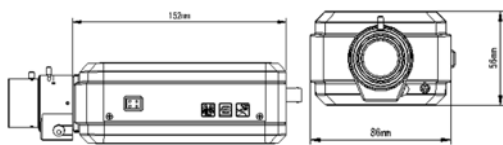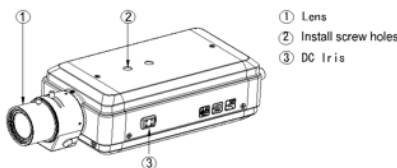

Specifications :

Image Sensor	1/2.8" 2.1 Megapixel PS Sony CMOS sensor
Effective Pixels	1920 x 1080
Scanning System	Progressive
Electronics Shutter Speed	Auto(1/25,1/30~1/10000s)
Min . Illumination	0.05Lux/F1.2 (Colour), 0.005Lux/F1.2 (B&W)
S/N Ratio	>50db
Video Output	1 Channel BNC (CVS)
Camera Features	
Day / Night	Auto (ICR) / Color to B&W
Backlight Compensation	BLC / HLC / WDR(digital)
White Balance	Auto
Gain Control	Auto
Noise Reduction	2D , 3D
Privacy Masking	Upto 4 Areas
Lens	
Lens Type	C/CS-Mount
Video	
Compression	H.264 High Profile, Main Profile, Baseline / MJPEG
Resolution	1920x1080, 1280x720, 960x528, 640x352, 480x256
Frame Rate	Preferred Stream : 1920x1080(1~25/30fps), 1280x720(1~25/30fps)
	Alternate Stream : 960x 528, 640x352, 480x256 (1~25/30fps)
Bit Rate	32KB ~ 16KB Mbps , support VBR , CBR
Audio	
Compression	G.711a / G.711U, G.726
Interface	1 Channel Input, 1 Channel Output
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	IPV4/IPV6, HTTP, TCP/IP, UDP, RTP, RTCP, UPNP, RTSP, SMPT, NTP, DHCP, DNS, PPPoE , DDNS, FTP
ONVIF	ONVIF Ver.2.0
Max .User Access	10 users
Smart Phone	iPhone, iPad , Android , Symbian
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
General	
Power Supply	DC12V
Power Consumption	≤ 3W
Temperature	-20°C ~ 60°C
Dimension	152 x 86 x 56 mm
Weight	0.7Kg