


BE-4913SD18-IR150 H.264, 1.3 MP IR PTZ IP Camera



Features :

- 1/3" 1.3 MP Hitachi Progressive Scan CMOS
- H.264 High Profile & MJPEG dual-stream
- Max 25/30fps@1.3MP (1980 x 960, 1280x720)
- WDR , D/N , AWB, AGC, BLC
- Auto dimming technology by video analysis
- With Outer aluminium windshield wiper
- Wall Mounted bracket of water proof power supply box integration
- 18x Optical Zoom
- IR distance 150m
- Multiple Network Monitoring: Web viewer, CMS, Smart phone
- IP66 Standard
- Micro SD Card Slot

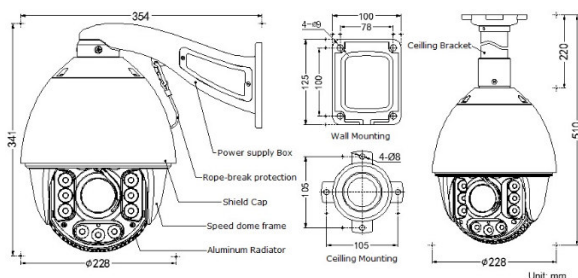

Specifications :	Image Sensor	1/3" 1.3 MP Hitachi Progressive Scan CMOS sensor
	Effective Pixels	1280 x 720
	Scanning System	Progressive
	Electronics Shutter Speed	Auto(1/25,1/30~1/10000s)
	Min . Illumination	0.1Lux/F1.6 (Colour), 0.05 Lux/F1.6 (B/W); 0Lux (IR on)
	S/N Ratio	>50db
	Preset	256 preset
	Pan Rotation Range	360°
	Tilt Range	180°
	Pan Speed	0.01°~360°/S
	Vertical Speed	0.01°~120°/S
	360° Scan	Auto Scanning
	Protocol	Hitachi
	Baud Rate(RS485)	1200/2400/4800/9600bps
Camera Features		
Day/Night	Color / B / W	
Backlight Compensation	BLC / HLC / WDR(digital)	
White Balance	Auto	
Gain Control	Auto	
Noise Reduction	3D	
Privacy Masking	Up to 4 Area	
Lens Zoom	18x Optional Zoom, 12x digital Zoom	
Focal Length	F= 4.7mm(W) ~ 84.6mm(T)	
Iris	F1.6~ F3.0	
Focus Control	Manual	
Angle of View	55.2(W)~3.7(T)	
OSD	Supported	
WDR	Supported	
IR Infrared	8 LEDs, IR distance 150 Meters	
Video		
Compression	H.264 High Profile / MJPEG	
Resolution	1280x960, 1280x720, 640 x352 , 320x160, 160x112 Preferred Stream : 1280x960(1~25/30fps), 1280x720(1~25/30fps)	
Frame Rate	Alternate Stream : 640x 352, 320x160, 160x112(1~25/30fps)	
Bit Rate	32KB ~ 16KB Mbps , support VBR , CBR	
Audio		
Compression	G.711a / G.711U, G.726	
Interface	1 Channel Input , 1 Channel Output	
Auxiliary Interface		
Memory Slot	Micro SD , Max 64GB	
Alarm	4-Alarm in & 2 Alarm Output (AC120V, 1A ; DC 24C 1A)	
PTZ	RS485	
Protocol	IPV4/IPV6, HTTP, TCP/IP, UDP, RTP, RTCP,UPNP, RTSP, SMPT, NTP, DHCP, DNS, PPPoE , DDNS, FTP	
Network		
Ethernet	RJ-45 (10/100Base-T)	
Protocol	IPV4/IPV6, HTTP, TCP/IP, UDP, RTP, RTCP,UPNP, RTSP, SMPT, NTP, DHCP, DNS, PPPoE , DDNS, FTP	
ONVIF	ONVIF Ver.2.0	
Max .User Access	10 users	
Smart Phone	iPhone, iPad, Android , Symbian	
General		
Power Supply	DC12V, + or - 10%	
Power Consumption	≤ 50W	
Temperature	-30°C ~ 60°C	
Size	6 inch Alloy Case	
Protection	IP66	
Dimension	228mm x 354mm x 341mm	
IP Grade	IP66/ Secondary Lightning Protection, 3000KV Surge	
Weight	6 KG	